
Texas Boom Company Specifications

24” Permanent Boom

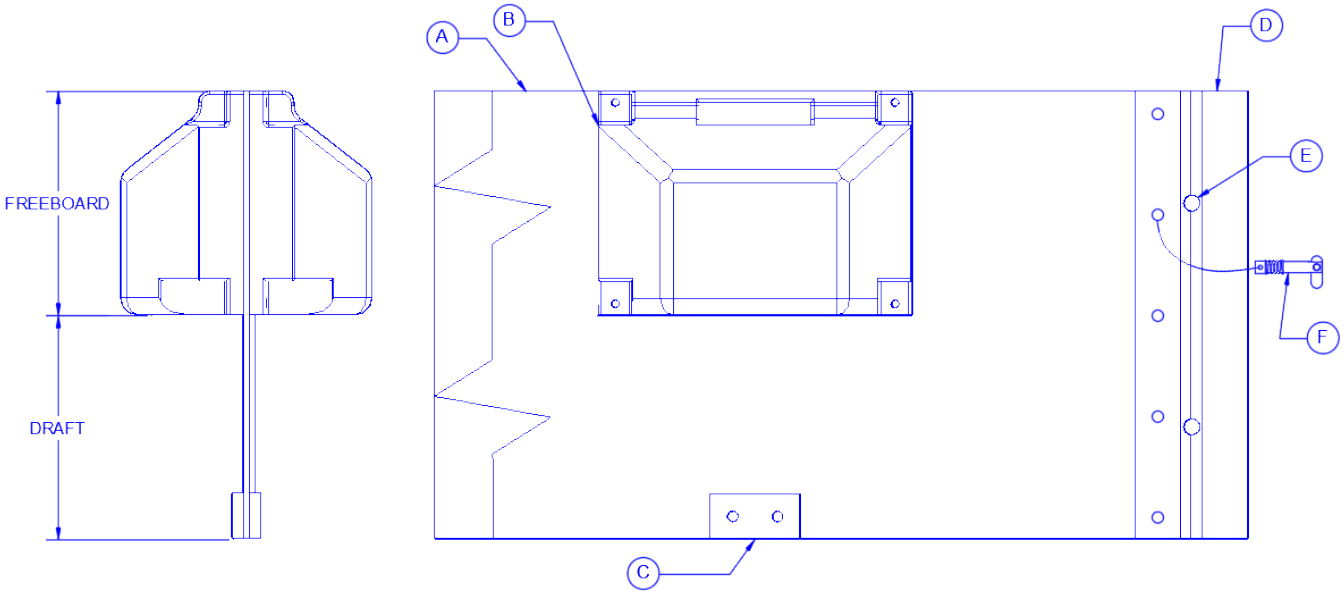

24” Permanent Boom
TXB-PB-24
Drawing Illustrative Only – Not to Scale
Freeboard: 10”
Draft: 14”
Section Length: 50 ft
Segments per 50’ Section: 20
Fabric: 150 oz PVC Conveyor Belt with UV Protection and Marine Growth Inhibitor
Color: Black Belt with Orange Floats
Floatation: Polyethylene (PE) Shells with UVEXTM Antioxidant and UV Protection filled with Oil Impervious Closed-Cell Foam
Ballast: Galvanized Steel Plates
End Connector: ASTM F962-94 Universal “Z” Connector, fitted with Stainless Steel Toggle Pin and Lanyard
Anchor Points: 2
Weight per 50’ Section: 250 lbs
Boom Ultimate Tensile Strength: 27,000^{+} lbs
Buoyancy to Weight Ratio: 3.5:1
Section Length Options: 25 ft / 50 ft

Boom Configuration
A: Belt
B: Foam Filled Polyethylene Float
C: Ballast Plate
D: ASTM End Connectors
E: Toggle Pin Hole
F: Toggle Pin

TBC Texas Boom Company

21401 Park Row Dr. Suite #340, Katy, TX 77449 (281) 441-2002 www.texasboom.com