
Texas Boom Company Specifications

8” Foam Filled Cranberry Boom

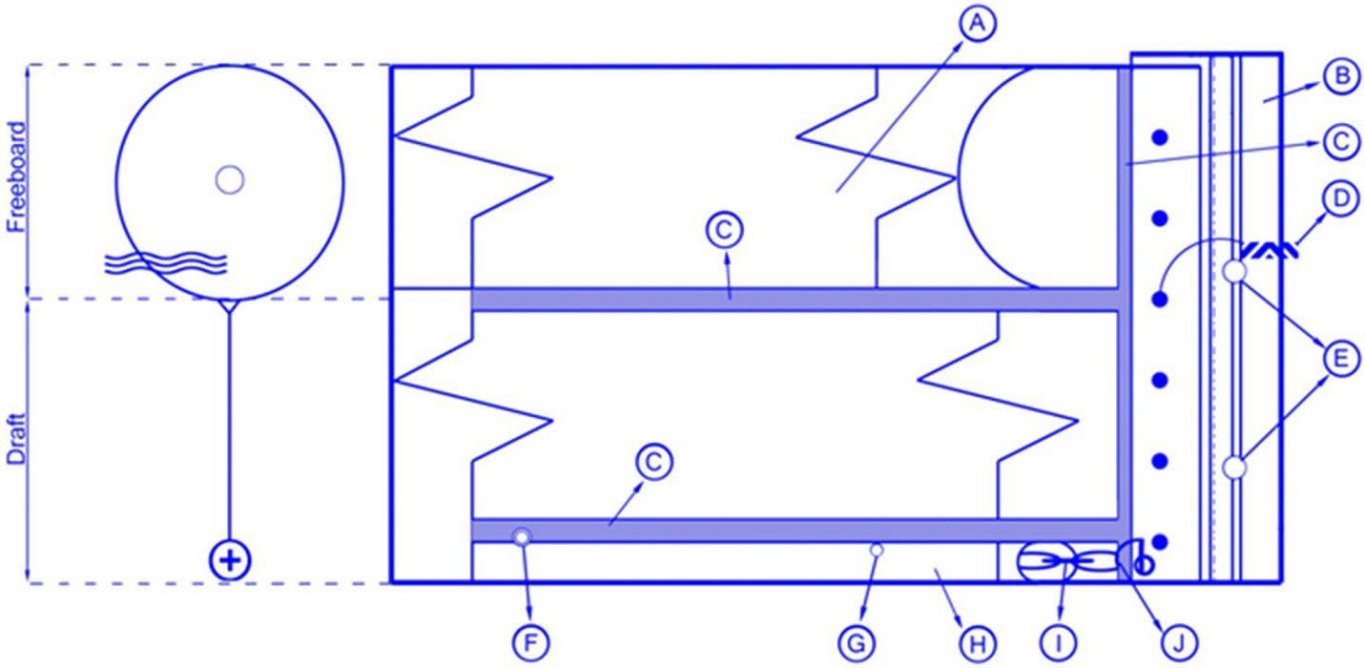

8” Foam Filled Cranberry Boom
TXCB-8
Drawing Illustrative Only – Not to Scale
Freeboard: 4”
Draft: 4”
Section Length: 50 ft
Segments per 50’ Section: 13
Fabric: 18 oz per Square Yard Vinyl Coated Polyester (PVC)
Color: Black, International Orange
Skirt: Solid or Permeable Mesh
Floatation Logs: Rolled Closed Cell Polyethylene Foam
Ballast and Bottom Tension: 1/4” HDG Steel Chain
End Connector: ASTM F962-94 Universal “Z” Connector, fitted with Stainless Steel Toggle Pin and Lanyard
Water Holes: 15
Anchor Points: 2
Weight per 50’ Section: 45 lbs
Storage Volume per 50’ Section: 8 ft^3
Boom Ultimate Tensile Strength: 5,000$^+$ lbs
Buoyancy to Weight Ratio: 5.00
Section Length Options: 50 ft / 100 ft

Boom Configuration
A: Foam Log
B: ASTM End Connectors
C: One Inch RF Welds
D: Toggle Pin
E: Toggle Pin Hole
F: Anchor Point
G: Air and Water Drainage Hole
H: Chain Pocket
I: Ballast Chain
J: Shackle

TBC Texas Boom Company

21401 Park Row Dr. Suite #340, Katy, TX 77449 (281) 441-2002 www.texasboom.com