
Texas Boom Company Specifications

8” TTC Foam Filled Cranberry Boom

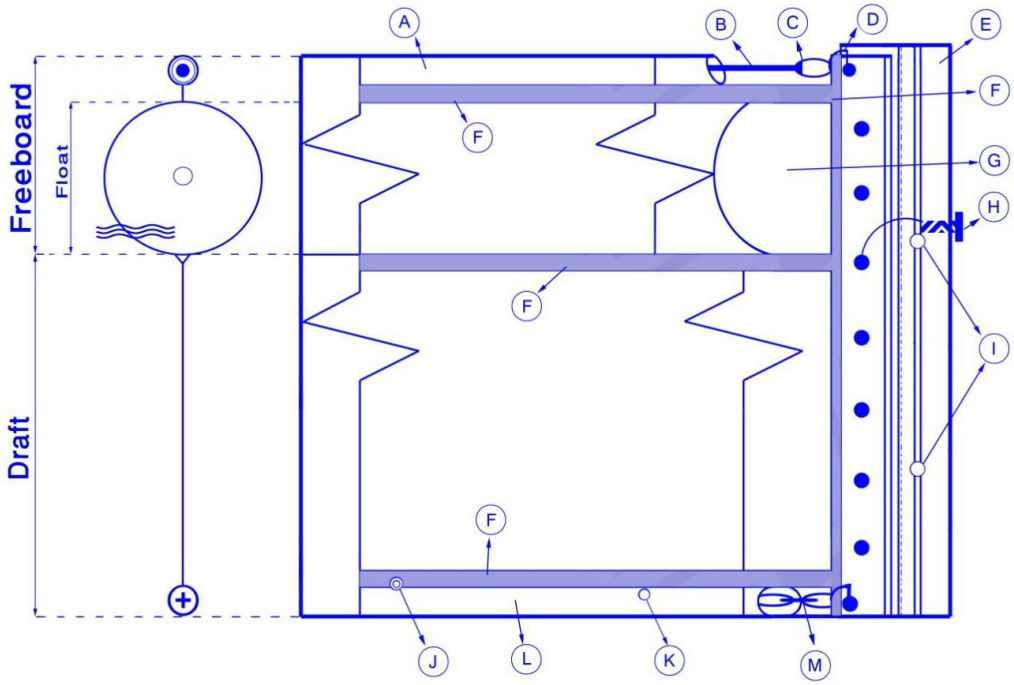

8” TTC Foam Filled Cranberry Boom
TXCB-8-TTC
Drawing Illustrative Only – Not to Scale
Freeboard: 4”
Draft: 4”
Section Length: 50 ft
Segments per 50’ Section: 13
Fabric: 18 oz per Square Yard Vinyl Coated Polyester (PVC)
Color: Black, International Orange
Skirt: Solid or Permeable Mesh
Floatation Logs: Rolled Closed Cell Polyethylene Foam
Top Tension Member: 5/16” HDG Steel Cable
Ballast and Bottom Tension: 1/4” HDG Steel Chain
End Connector: ASTM F962-94 Universal “Z” Connector, fitted with Stainless Steel Toggle Pin and Lanyard
Water Holes: 15
Anchor Points: 2
Weight per 50’ Section: 45 lbs
Storage Volume per 50’ Section: 8 ft^3
Boom Ultimate Tensile Strength: 5,000+ lbs
Buoyancy to Weight Ratio: 5.00
Section Length Options: 50 ft / 100 ft

Boom Configuration
A: Top Tension Pocket
B: Top Tension
C: Cable Eye with Thimble
D: Shackle
E: ASTM End Connectors
F: One Inch RF Welds
G: Foam Log
H: Toggle Pin
I: Toggle Pin Hole
J: Anchor Point
K: Air and Water Drainage Hole
L: Chain Pocket
N: Grommets

TBC Texas Boom Company

21401 Park Row Dr. Suite #340, Katy, TX 77449 (281) 441-2002 www.texasboom.com