
Texas Boom Company Specifications

Standard Floating Baffle Turbidity Curtain

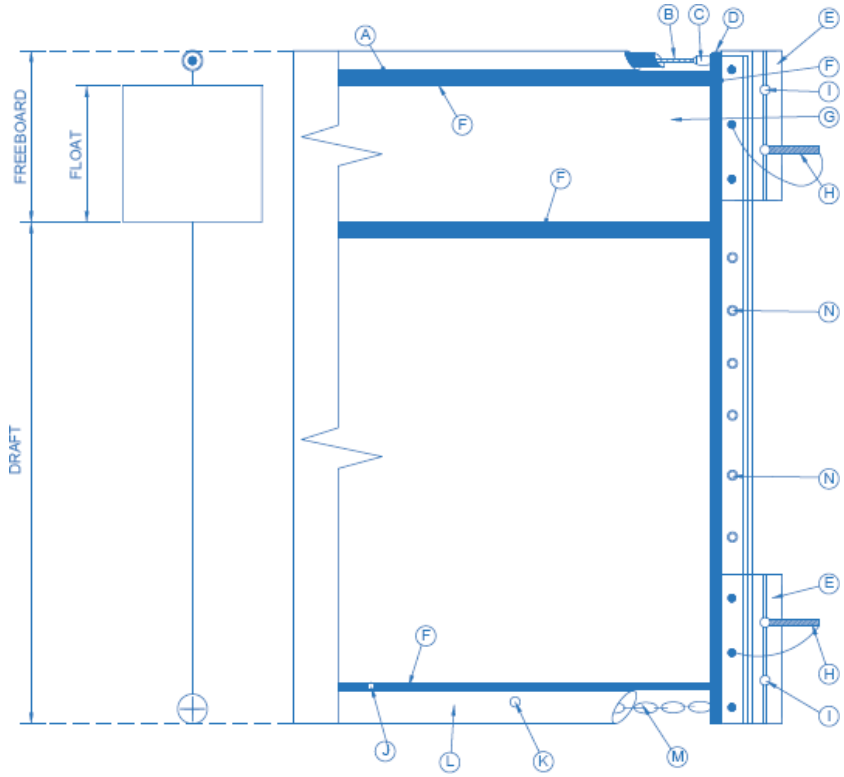

Standard Floating Baffle Turbidity Curtain
Drawing Illustrative Only – Not to Scale
Freeboard: 6” or greater
Draft: 240”
Section Length: 100 ft
Segments per 100’ Section: 26
Fabric: 35 oz per Square Yard Vinyl Coated Polyester (PVC)
Color: Black
Skirt: Permeable and Tapered Option Available
Floatation Logs: Solid EPS Rectangular Foam
Top Tension Member: 5/16” SST Cable
Ballast and Bottom Tension: 5/16” HDG Steel Chain
End Connector: ASTM F962-94 Universal “Z” Aluminum Connectors in Top and Bottom. Lacing Grommets on reinforced seams between Connectors. Rope, strong Zip Ties, and Nuts and Bolts can be used to connect Grommets.
Water Holes: 26
Anchor Points: 3
Section Length Options: 50 ft / 100 ft

Curtain Configuration
A: Top Tension Pocket
B: Top Tension
C: Cable Eye with Thimble
D: Shackle
E: ASTM End Connectors
F: One Inch RF Welds
G: Foam Log
H: Toggle Pin
I: Toggle Pin Hole
J: Anchor Point
K: Air and Water Drainage Hole
L: Chain Pocket
M: Ballast Chain
N: Grommets

TBC Texas Boom Company

21401 Park Row Dr. Suite #340, Katy, TX 77449 (281) 441-2002 www.texasboom.com